

DWL-G730AP



- Portable 802.11g Wireless Connectivity
- Operates as an Access Point, Router, or Wireless Client
- Includes Convenient Travel Case
- Pocket-sized for Increased Mobility



AirPlus™ G 802.11g/2.4GHz Wireless Pocket Router/AP™



D-Link, an industry leader in networking, introduces another performance breakthrough in wireless connectivity – the AirPlus G DWL-G730AP Wireless Pocket Router/AP™. The DWL-G730AP is a portable and convenient wireless solution for the traveling businessperson delivering 802.11g wireless connectivity with a maximum wireless signal rate of up to 54Mbps¹. Use it in conference rooms, hotel rooms, or even at hotspots.

The Pocket Router/AP might be small in size, but is huge in functionality. The DWL-G730AP supports multiple operation modes including: Access Point (AP) mode to create a wireless connection; Router mode to share an Internet connection; and Wireless Client mode to connect an existing wireless network. Easily switch between these modes by using the 3-way configuration switch located on the bottom of the unit.

In AP mode, the DWL-G730AP can be used to create a wireless network in a room where a single Ethernet port is provided. Now multiple wireless clients can connect to the network at the same time to share resources and files.

In Router mode, the DWL-G730AP can be used to share a single broadband Internet connection, such as in a hotel room.

The internal DHCP server automatically assigns IP addresses to ensure everyone in the room can connect to the Internet. In addition, the DWL-G730AP supports VPN Pass-through and firewall features including Network Address Translation (NAT) and MAC filtering to protect your wireless network from malicious attacks.

When set in Wireless Client mode, the DWL-G730AP allows a laptop to connect to an existing wireless network, without having to install complicated drivers or additional software. For added mobility, the DWL-G730AP can be powered over USB if power outlets are not available.

The Pocket Router/AP supports WPA-PSK to secure your wireless data communications. In AP mode, the DWL-G730AP adds support for 802.1x user authentication with an external RADIUS server. For setup and configuration the DWL-G730AP can be accessed via D-Link's user-friendly Web-based utility.

Easy to pack and convenient for traveling, the DWL-G730AP comes in an attractive carrying case with the essential cables and a power adapter. Increase productivity and enjoy the benefits of wireless connectivity while on the road with D-Link's Pocket Router/AP.

¹ Maximum wireless signal rate based on IEEE Standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors lower actual data throughput rate.

AirPlus™ G

802.11g/2.4GHz Wireless Pocket Router/AP™

DWL-G730AP



SPECIFICATIONS

Standards

- IEEE 802.11b
- IEEE 802.11g
- IEEE 802.3
- IEEE 802.3u

Device Management

- Web-Based – Internet Explorer v6 or Netscape Navigator v7

Signal Rate¹

- For 802.11g:
- 54, 48, 36, 24, 18, 12, 9 and 6Mbps
- For 802.11b:
- 11, 5.5, 2, and 1Mbps

Security

- 64/128-bit WEP
- WPA –PSK
- 802.1x²
- MAC Address Filtering
- SSID Broadcast Disable

Wireless Frequency Range

- 2.412GHz to 2.462GHz

Wireless Operating Range³

802.11g (Full Power with internal antenna)
Outdoors:

- 164ft (50m) @ 54Mbps
- 492ft (150m) @ 11Mbps
- 656ft (200m) @ 6Mbps

Power

- External Power Supply: DC 5V/1.2A

Radio and Modulation Type

For 802.11g:

- OFDM:
- BPSK @ 6 and 9Mbps
 - QPSK @ 12 and 18Mbps
 - 16QAM @ 24 and 36Mbps
 - 64QAM @ 48 and 54Mbps

DSSS:

- DBPSK @ 1Mbps
- DQPSK @ 2Mbps
- CCK @ 5.5 and 11Mbps

For 802.11b:

DSSS:

- DBPSK @ 1Mbps
- DQPSK @ 2Mbps
- CCK @ 5.5 and 11Mbps

Wireless Transmit Power

Typical RF Output Power at each Data Rate
For 802.11g:

- 31mW (15dBm) @ 54Mbps
- 40mW (16dBm) @ 48Mbps
- 40mW (16dBm) @ 36, 24, 18, 12, 9, and 6Mbps

For 802.11b:

- 50mW (17dBm) @ 11, 5.5, 2, and 1Mbps

Receiver Sensitivity

For 802.11g:

- 6Mbps: -87dBm
- 9Mbps: -85dBm
- 12Mbps: -82dBm
- 18Mbps: -81dBm
- 24Mbps: -80dBm
- 36Mbps: -79dBm
- 48Mbps: -71dBm
- 54Mbps: -69dBm

For 802.11b:

- 1Mbps: -90dBm
- 2Mbps: -90dBm
- 5.5Mbps: -86dBm
- 11Mbps: -85dBm

LEDs

- Power
- WLAN
- LAN

Temperature

- Operating: 32°F to 131°F (0°C to 55°C)
- Storing: -4°F to 149°F (-20°C to 65°C)

Humidity

- Operating: 10%–90% (non-condensing)
- Storing: 5%–95% (non-condensing)

Certifications

- FCC
- CE

Dimensions


- L = 3.15 inches (80mm)
- W = 2.36 inches (60mm)
- H = 0.67 inches (17mm)

Weight

- 0.11 lbs (50g)

Warranty

- 1 Year

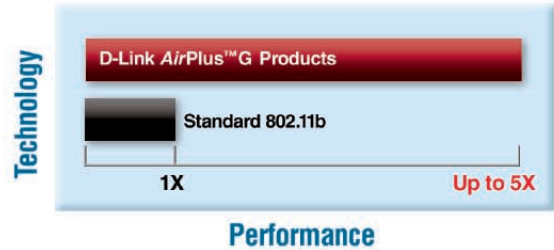

The DWL-G730AP provides you with a mobile solution to add 802.11g wireless connectivity while on the road.



¹ Maximum wireless signal rate based on IEEE Standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors lower actual data throughput rate.

² 802.1x supported in Access Point mode only.

³ Environmental conditions may adversely affect wireless signal range.



D-Link Systems, Inc. 17595 Mt. Hermann Fountain Valley CA 92708-4160 www.dlink.com

©Copyright D-Link Systems, Inc. 2004. All rights reserved. D-Link® is a registered trademark of D-Link Systems, Inc.

Other trademarks or registered trademarks are the property of their respective manufacturers or owners.

Price and specifications are subject to changes without notice. See inside package for warranty details.

*24/7 Tech Support is available only in USA.

All references to speed are for comparison purposes only.

D-Link®
Building Networks for People