



Multifunctional POS Peripherals

- MONITOR
- MAGNETIC STRIP READER
- CUSTOMER LINE DISPLAY
- POS PRINTER
- PROGRAMMABLE KEYBOARD
- SIGNATURE PAD
- BARCODE SCANNER
- CASH DRAWER
- SYSTEM SIDE ATTACHMENT

Monitor



LM-2008E

- 8" TFT LCD panel
- LCD resolution up to 800 x 600
- Easy tilt angle adjustment
- Optional VESA mounting kit (WB-6812)
- Dimension : 220.47 mm (H) x 209.95 mm (W) x 211.73 mm (D);
Weight : 0.96 kg



LM-2210X

- 10.1" TFT LCD panel
- LCD resolution up to 1024 x 768
- Easy tilt angle adjustment
- VESA mounting support
- Dimension : 221 mm (H) x 246.8 mm (W) x 194 mm (D);
Weight : 1.31 kg



LM-2012X / TM-2012X

- Compact design, ideal for cramped space
- High Quality 12.1" TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-2012X
- Optional side attachment support (SD-366)
- Flexible installation with VESA mounting support
- Dimension : 261.67 mm (H) x 298 mm (W) x 253.71 mm (D);
Weight : 2.48 kg



LM-8115G / TM-8115X

- 15" TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-8115X
- Easy tilt angle adjustment from 18° to 75°
- 2 x USB port support
- Optional side attachment support (SD-466Z or KP-300W)
- Optional VESA mounting kit (WB-6000V-B)
- Dimension : 345 mm (H) x 377.7 mm (W) x 254 mm (D);
Weight : 5.69 kg



TM-7117X/TM-7117IR

- 17" TFT LCD panel
- LCD resolution up to 1280 x 1024
- 5-wire resistive touch panel for TM-7117X
- IR touch panel for TM-7117IR
- Easy tilt angle adjustment from 15° to 70°
- 2 x USB port support
- Optional side attachment support (SD-466Z or KP-300W)
- Optional VESA mounting kit (WB-6000V-B)
- Dimension : 401 mm (H) x 385 mm (W) x 286 mm (D);
Weight : 6.82 kg



LM-3110 / TM-3110

- Slim bezel-free design
- 9.7" TFT LCD panel
- LCD resolution up to 1024 x 768
- PCAP touch panel for TM-3110
- VESA mounting support
- Dimension : 206 mm (H) x 244.5 mm (W) x 187.5 mm (D);
Weight : 1.69 kg

Monitor



LM-3114 / TM-3114

- Slim bezel-free design
- 14" wide screen TFT LCD panel (16:9 aspect ratio)
- LCD resolution up to 1366 x 768
- PCAP touch panel for TM-3114
- Optional side attachment support for TM-3114 (SL-104)
- VESA mounting support
- Dimension : 271.2 mm (H) x 371.6 mm (W) x 252 mm (D);
Weight : 3.69 kg



LM-3115 / TM-3115

- Slim bezel-free design
- 15" TFT LCD panel
- LCD resolution up to 1024 x 768
- PCAP touch panel for TM-3115
- Optional side attachment support for TM-3115 (SL-105)
- VESA mounting support
- Dimension : 300 mm (H) x 372 mm (W) x 258 mm (D);
Weight : 4.71 kg



LM-6x07 Series

- USB interface monitor for system without secondary display interface
- 7" TFT LCD panel
- LCD resolution up to 800 x 480
- Dimension : 471 mm (H) x 221.5 mm (W) x 188 mm (D);
Weight : 0.86 kg for standalone LM-6207
- LM-6207 : Standalone
- LM-6307 : Terminal rear-mount for POSIFLEX 15"/17" KS series terminal
- LM-6507 : Terminal rear-mount for POSIFLEX HS series terminal
- LM-6607 : Terminal rear-mount for POSIFLEX XT series terminal



LM-6210U

- Standalone USB interface monitor for system without secondary display interface
- 9.7" TFT LCD panel
- LCD resolution up to 1024 x 768
- VESA mounting support
- Dimension : 206 mm (H) x 244.5 mm (W) x 187.5 mm (D);
Weight : 1.69 kg



LM-3310

- Slim design
- 9.7" TFT LCD panel
- LCD resolution up to 1024 x 768
- VESA mounting support
- Dimension : 206 mm (H) x 244.5 mm (W) x 187.5 mm (D);
Weight : 1.69 kg



LM-3315 / TM-3315

- Slim design
- 15" TFT LCD panel
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3315
- Optional side attachment support for TM-3315 (SL-105)
- VESA mounting support
- Dimension : 300 mm (H) x 372 mm (W) x 258 mm (D);
Weight : 4.71 kg

Monitor



LM-2208

- 8" rear-mount LCD 2nd display for POSIFLEX XP series terminal
- LCD resolution up to 800 x 600
- Tilt angle adjustment



LM-2310X

- 10.1" rear-mount LCD 2nd display for POSIFLEX KS-7210 terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-2212X

- 12.1" rear-mount LCD 2nd display for POSIFLEX XP series terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-2312X

- 12.1" rear-mount LCD 2nd display for 15"/17" POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-2412X

- 12.1" rear-mount LCD 2nd display for POSIFLEX KS-7212 terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-8015X

- 15" base-mount LCD 2nd display for POSIFLEX terminal with 5th / 5.5th generation base
- LCD resolution up to 1024 x 768
- 300 mm pole height
- Tilt and Swivel adjustment

Monitor



LM-8025X

- 15" base-mount LCD 2nd display for POSIFLEX terminal \ with 5th / 5.5th generation base
- LCD resolution up to 1024 x 768
- 300 mm pole height
- Optional side attachment support (SD-466Z)
- Tilt and Swivel adjustment



LM-8035X

- 15" rear-mount LCD 2nd display for 15"/17" POSIFLEX terminal
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-8045X / TM-8045X

- 15" base-mount LCD 2nd display for POSIFLEX terminal with 5th generation base
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-8045
- Tilt angle adjustment



LM-8055X

- 15" base-mount LCD 2nd display for POSIFLEX terminal with 6th generation base
- LCD resolution up to 1024 x 768
- Tilt angle adjustment



LM-6101X

- 12.1" base-mount LCD 2nd display for POSIFLEX terminal with 5th/5.5th generation base
- LCD resolution up to 1024 x 768
- Tilt and Swivel adjustment



LM-6801X

- 12.1" base-mount LCD 2nd display for POSIFLEX terminal with 6th generation base
- LCD resolution up to 1024 x 768
- Tilt and Swivel adjustment

Monitor



LM-3015F / TM-3015F

- Slim bezel-free design
- 15" rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1024 x 768
- PCAP touch panel for TM-3015F



LM-3015F/KS TM-3015F/KS

- Slim bezel-free design
- 15" rear-mount LCD 2nd display for POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768
- PCAP touch panel for TM-3015F/KS



LM-3010F/HS

- Slim bezel-free design
- 9.7" rear-mount LCD 2nd display for POSIFLEX HS series terminal
- LCD resolution up to 1024 x 768



LM-3210/HS

- Slim design
- 9.7" rear-mount LCD 2nd display for POSIFLEX HS series terminal
- LCD resolution up to 1024 x 768



LM-3215F/KS TM-3215F/KS

- Slim bezel-free design
- 15" rear-mount LCD 2nd display for POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3215F/KS

Monitor



LM-3010F / TM-3010F

- Slim bezel-free design
- 9.7" rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1024 x 768
- PCAP touch panel for TM-3010F



LM-3014F / TM-3014F

- Slim bezel-free design
- 14" rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1366 x 768 (wide screen 16:9 aspect ratio)
- PCAP touch panel for TM-3014F



LM-3010F/KS

- Slim bezel-free design
- 9.7" rear-mount LCD 2nd display for POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768



LM-3210/KS

- Slim design
- 9.7" rear-mount LCD 2nd display for POSIFLEX KS series terminal
- LCD resolution up to 1024 x 768



LM-3210

- Slim design
- 9.7" TFT LCD 2nd display for POSIFLEX XT series
- LCD resolution up to 1024 x 768
- VESA mounting support



LM/TM-3215

- Slim bezel-free design
- 15" rear-mount LCD 2nd display for POSIFLEX XT series terminal
- LCD resolution up to 1024 x 768
- 5-wire resistive touch panel for TM-3215

Customer Line Display



PD-7600 Series

- Standalone Graphic STN LCD Customer Line Display
- Blue background with white backlight
- Four-line display with 30 Arabic letters or 15 Chinese characters per line
- Large character size for easy viewing : 8,47 mm x 4,24 mm
- Front display contrast adjustment buttons
- 15°, 30° and 45° tilt angle adjustment
- 270° horizontal swivel adjustment
- Command emulation support : ESC/POS
- Interface : Serial
- Dimension : 221 mm (W) x 110 mm (D) x 431 mm (H);
Weight : 0.92 kg for standalone PD-7610R, PD-7620R and PD-7630R

- PD-7610R** : Standalone (300 mm pole), Simplified Chinese (GB-2312), ivory or black
- PD-7611R** : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Simplified Chinese (GB-2312), black
- PD-7612R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Simplified Chinese (GB-2312), black
- PD-7613R** : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Simplified Chinese (GB-2312), black
- PD-7614R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10° & 12° KS terminal / XP series and DT series, Simplified Chinese (GB-2312), black
- PD-7620R** : Standalone (300 mm pole), Traditional Chinese (BIG-5), ivory or black
- PD-7621R** : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Traditional Chinese (BIG-5), black
- PD-7622R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Traditional Chinese (BIG-5), black
- PD-7623R** : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Traditional Chinese (BIG-5), black
- PD-7624R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10° & 12° KS terminal / XP series and DT series, Traditional Chinese (BIG-5), black
- PD-7630R** : Standalone (300 mm pole), Arabic (Windows code page 01256), ivory or black
- PD-7631R** : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Arabic (Windows code page 01256), black
- PD-7632R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Arabic (Windows code page 01256), black
- PD-7633R** : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Arabic (Windows code page 01256), black
- PD-7634R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10° & 12° KS terminal / XP series and DT series, Arabic (Windows code page 01256), black



PD-2600 Series

- VFD Customer Line Display
- Green or Blue screen filter
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 15°, 30° and 45° tilt angle adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Dimension : 220 mm (W) x 110 mm (D) x 410 mm (H);
Weight : 0.84 kg for standalone PD-2600R and PD-2600UE

- PD-2600R** : Standalone (300 mm pole), 270° horizontal swivel, Serial interface, ivory or black
- PD-2600UE** : Standalone (300 mm pole), 270° horizontal swivel, USB HID & USB Virtual COM selectable, ivory or black
- PD-2601R** : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, Serial interface, ivory or black
- PD-2601UE** : Rear-mount with pole (200 mm) for POSIFLEX HT/PB series terminal, USB HID & USB Virtual COM selectable, ivory or black
- PD-2602R** : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, Serial interface, black
- PD-2602UE** : Base-mount with pole (200 mm) for POSIFLEX terminal with 5th generation base, USB HID & USB Virtual COM selectable, black
- PD-2603R** : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Serial interface, black
- PD-2603UE** : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, USB HID & USB Virtual COM selectable, black
- PD-2604UE** : Rear-mount for POSIFLEX 10°/12°/15°/17° KS series terminal, USB HID & USB Virtual COM selectable, black or white
- PD-2605UE** : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th /7th /8th generation base / 10° & 12° KS terminal / XP series and DT series, USB HID & USB Virtual COM selectable, ivory or black
- PD-2606UE** : Rear-mount for POSIFLEX XP series terminal, USB HID & USB Virtual COM selectable, black
- PD-2607UE** : Rear-mount for POSIFLEX HS series terminal, USB HID & USB Virtual COM selectable, black or white
- PD-2608UE** : Rear-mount for POSIFLEX XT series terminal, USB HID & USB Virtual COM selectable, black or white

Customer Line Display



PD-2800UE

- Standalone VFD Customer Line Display
- Adjustable pole height
- Green or Blue screen filter
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 15° and 23° tilt angle adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Interface : USB HID & USB Virtual COM selectable
- Dimension : 200mm (W) x 116 mm (D) x 265 mm ~ 395 mm (H);
Weight : 0.48 kg



PD-2702

- Embedded VFD Customer Line Display for POSIFLEX EP series terminal
- Two-line display with 20 characters per line
- Command emulations support : Aedex, ESC/POS, Futaba, Noritake, UTC
- Interface : Serial (Internal RS232 in EP series terminal)



PD-201R

- Rear-top mounted LCD Customer Line Display for POSIFLEX DT series terminal
- Single-line display with 16 characters per line
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Interface : Serial



PD-320UE

- Standalone LCD Customer Line Display
- Adjustable pole height
- Blue character and yellow background
- Two-line display with 20 characters per line
- Large character size for easy viewing : 6.0 mm x 9.6 mm
- 15° and 23° tilt angle adjustment
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Interface : USB HID & USB Virtual COM selectable
- Dimension : 200 mm (W) x 116 mm (D) x 265 mm ~ 395 mm (H);
Weight : 0.48 kg

Customer Line Display



PD-300 Series

- LCD Customer Line Display
- Blue character and yellow background
- Two-line display with 20 characters per line
- Large character size for easy viewing : 6.0 mm x 9.6 mm
- 15°, 30° and 45° tilt angle adjustment
- Command emulations support : PST (POSIFLEX proprietary command) & ESC/POS
- Dimension : 220 mm (W) x 110 mm (D) x 410 mm (H);
Weight : 0.84 kg for standalone PD-300R

- PD-300R* : Standalone (300 mm pole), 270° horizontal swivel, Serial interface
- PD-302* : Rear-mount for POSIFLEX TP series terminal, Serial interface
- PD-305* : Base-mount for POSIFLEX terminal with 5th generation base, Serial interface
- PD-308R* : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, Serial interface
- PD-308UE* : Rear-mount with pole (200 mm) for POSIFLEX FT series terminal, USB HID & USB Virtual COM selectable
- PD-309UE* : Base-mount with pole (200 mm) for POSIFLEX terminal with 6th / 7th / 8th generation base / 10" & 12" KS terminal / XP series and DT series, USB HID & USB Virtual COM selectable
- PD-310UE* : Rear-mount for POSIFLEX 10"/12"/15"/17" KS series terminal, USB HID & USB Virtual COM selectable
- PD-330UE* : Rear-mount for POSIFLEX XP series terminal, USB HID & USB Virtual COM selectable
- PD-340UE* : Rear-mount for POSIFLEX HS series terminal, USB HID & USB Virtual COM selectable
- PD-350UE* : Rear-mount for POSIFLEX XT series terminal, USB HID & USB Virtual COM selectable
- PD-340R* : Rear-mount for POSIFLEX XT series terminal, Serial interface
- PD-350R* : Rear-mount for POSIFLEX XT series terminal, Serial interface



PD-2300 / PD-2300U

- VFD Customer Line Display
- Green or Blue screen filter
- Adjustable pole height
- Two-line display with 20 characters per line
- Large character size for easy viewing : 9.03 mm x 5.25 mm
- 14.5° and 30° tilt angle adjustment
- Near 360° horizontal swivel adjustment
- Various command emulations selectable by DIP switch : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- 12 international character sets support
- Interface : Serial (PD-2300) or USB (PD-2300U)
- Dimension : 260 mm (W) x 110 mm (D) x 291 mm ~ 426 mm (H);
Weight : 0.93 kg



PD-6x07U Series

- 7" Graphical Customer Line Display
- TFT LCD panel with resolution up to 800 x 480
- 20 x 2, 20 x 4, 30 x 4 characters support
- Adjustable font and background color
- JPEG graphics display support
- Command emulations support : ADM, Aedex, ESC/POS, Futaba, Noritake, UTC
- Dimension : 471 mm (H) x 221.5 mm (W) x 188 mm (D);
Weight : 0.86 kg for standalone PD-6207U

- PD-6207U* : Standalone (300 mm pole)
- PD-6307U* : Terminal rear-mount for POSIFLEX 15"/17" KS series terminal
- PD-6507U* : Terminal rear-mount for POSIFLEX HS series terminal
- PD-6607U* : Terminal rear-mount for POSIFLEX XT series terminal

Magnetic Strip Reader



MR-2106 Series / MR-2200 Series

- Bi-directional swipe
- Heavy duty die-casting housing
- 3-track support
- Support ISO 7811 magnetic card
- Dual head / dual sided swipe support (MR-2200)
- Dimension : 145 mm (W) x 46 mm (D) x 34 mm (H);
Weight : 0.49 kg
- Interface : USB, Serial or PS/2
- Color : ivory or black

POS Printer



AURA PP-9000U

- 3" high-speed thermal printer with auto cutter
- Stylish curvy design
- Spill-resistant
- Up to 300 mm/sec in low-noise printing
- High-resolution printing up to 8 dots/mm and 640 dots/line
- 83 mm, 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- "Drop-and-load" action for easy paper roll replacement
- Easy paper jam clearance with one push on "Hood Release Button"
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H);
Weight : 1.2 kg



AURA PP-8800U

- 3" high-speed thermal printer with auto cutter
- External cover for spill-resistance (optional)
- Up to 220 mm/sec in low-noise printing
- High-resolution printing up to 8 dots/mm and 576 dots/line
- 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- "Drop-and-load" action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H);
Weight : 1.2 kg



AURA PP-6900U/PP-6901U

- 3" thermal printer with auto cutter
- Printing speed up to 200 mm/sec
- High-resolution printing up to 8 dots/mm and 576 dots/line
- 80 mm or 58 mm paper width support
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- "Drop-and-load" action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) + optional Serial, Parallel, LAN or Wireless interface module
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H);
Weight : 1.2 kg
- PP-6901U for POSIFLEX XT-2614E Android POS



AURA PP-5200F

- 2" high-speed thermal printer with auto cutter
- Printing speed up to 220 mm/sec
- High-resolution printing up to 8 dots/mm and 432 dots/line
- QR code and PDF417 printing support
- Wall-mount ready for flexible deployment
- "Drop-and-load" action for easy paper roll replacement
- Control over 2 cash drawers through 1 CR port
- Optional kitchen bell function
- Interface : USB (True USB & Virtual COM selectable) or Serial
- Dimension : 120 mm (W) x 203 mm (D) x 124 mm (H);
Weight : 1.15 kg

POS Printer



AURA PP-6906W

- 3" web based thermal printer with auto cutter
- Android, IOS and Windows support
- Embedded Linux + Embedded HTTP Sever
- LAN and WIFI 2-in-1 interface
- Allow OS independent printing from SOAP/HTTP supported devices
- No seperate web server is required for printing
- Printing speed up to 200mm/sec
- Printing resolution up to 180 x 180dpi
- 80mm or 58mm paper width support
- IQR code and PD417 printing support
- Dimension : 148 mm (W) x 205 mm (D) x 143 mm (H);
Weight : 1.2 kg

Programmable Keyboard



KB-6800 / KB-6800U

- Powerful programming capability
- Programming under DOS (KB-6800 only) and Windows, multiple page, multiple level, whole range key content, time delay, position sense answer back code, etc.
- True spill-resistant design
- Optional blank key, double key for alternative key group layout
- Optional MSR (HID/VCOM Selectable)
- 70 programming keys + 6 position control key
- Key top size: 18 mm x 22 mm for single key
- Interface : PS/2 (KB-6800) or USB (KB-6800U)
- Dimension : 340 mm (W) x 150 mm (D) x 58 mm (H);
Weight : 1.05 kg



KB-6600 / KB-6600U

- Powerful programming capability
- Programming under DOS (KB-6600 only) and Windows, multiple page, multiple level, whole range key content, time delay, position sense answer back code, etc.
- True spill-resistant design
- Optional blank key, double key for alternative key group layout
- Optional MSR (HID/VCOM Selectable)
- 84 programmable keys + 6 position control key
- Key top size : 19 mm x 19 mm for single key
- Interface : PS/2 (KB-6600) or USB (KB-6600U)
- Dimension : 340 mm (W) x 150 mm (D) x 58 mm (H);
Weight : 1.09 kg



KB-4000 / KB-4000U

- 40 programmable keys in 4 x 10 matrix structure
- Software program for non-English (European) language
- Optional MSR and Smartcard reader (HID/VCOM Selectable)
- Interface : PS/2 (KB-4000) or USB (KB-4000U)
- Dimension: 210 mm (W) x 138 mm (D) x 56 mm (H);
Weight : 0.87 kg

Signature Pad



SP-1200

- ITO resistive touch pad over 3.8" FSTN LCD
- Adjustable LCD backlight contrast
- Display area 3" (H) x 2.3" (V) with resolution of 320 x 240
- Touch resolution : 500 dpi
- Tethered non-electronic stylus
- Low power consumption: 70mA @ 5V DC through USB interface
- Providing smooth bitmap and resolution required for signature verification
- Simultaneous view of electronic signature on LCD pad and display monitor for visual signature verification
- Interface : USB
- Dimension : 150 mm (W) x 122 mm (D) x 26 mm (H);
Weight : 0.37 kg

Barcode Scanner



CD-3860R / CD-3860U

- 1D long-range handheld CCD scanner
- Large trigger for effortless operation
- Majority of 1D barcodes decoding support including GS1 DataBar
- Depth of Field : 0–350 mm at 20 mil
- Scan Rate : 330 scans/sec for single-line scanning
- Adjustable stand for hand-free operation (optional)
- Drop Resistance : 1.5 m
- Dimension : 152 mm x 64 mm x 105 mm; Weight : 120 g
- Interface : Serial (CD-3860R) or USB (CD-3860U)



CD-4870R / CD-4870U

- 2D handheld image scanner
- Majority of 1D and 2D barcodes decoding support
- Depth of Field : 0 – 500 mm at 20 mil
- Scan Rate : 120 scans/sec in 1D mode
- Scan Rate : 60 images/sec in 2D mode
- Adjustable stand for hand-free operation (optional)
- Drop Resistance : 1.5m
- Dimension : 169.3 mm x 62.6 mm x 71.7 mm; Weight : 120 g
- Interface support : Serial (CD-4870R) or USB (CD-4870U)

Barcode Scanner



MS-5145U / MS-5145R / MS-5145K

- 1D laser scanner
- Wider width of field than a typical CCD
- Depth of Field : 0 – 140 mm at 13 mil
- Scan Rate: 72 scans/sec for single-line scanning
- Barcode data can be custom edited
- Easy to program with Windows-based utility or barcode menu
- Drop Resistance : 1.5 m
- Dimension : 187 mm x 82 mm x 64 mm; Weight : 97 g
- Interface : USB (MS-5145U), Serial (MS-5145R) or PS/2 (MS-5145K)



LS-1000U


- 1D compact omnidirectional laser scanner with a detachable cradle
- Button switching between omnidirectional and single-line scanning
- Depth of Field : 0–200 mm (UPC/EAN 100%, PCS = 90%)
- Scan Patten : 5 directions of scan field, 20 scan lines
- Scan Rate : 1400 scans/sec for omnidirectional scanning
- Scan rate : 74 scans/sec for single-line scanning
- Stand alone or mounted solution
- Drop Resistance : 1.5 m
- Dimension : 111 mm (H) x 66 mm (D) x 70 mm (W); Weight : 200 g
- Interface : USB

Cash Drawer



TS-2200U / TS-2200R

- High performance 1D omnidirectional laser scanner
- Programmable sleep mode & Reactivated by simple push of a button
- Full automatic scanning operation
- Depth of Field : 300 mm (EAN 0.33 mm / 13 mil, PCS = 90%)
- Scan Patten : 7 directions of scan field, 24 scan lines
- Scan Rate : 2400 scans/sec for omnidirectional scanning
- Dimension : 152 mm (H) x 152 mm (W) x 91 mm (D); Weight : 450 g
- Interface : USB (TS-2200U) or Serial (TS-2200R)

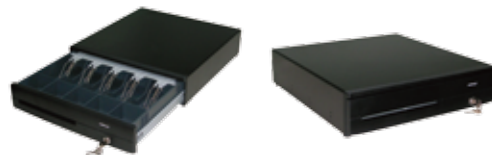

CR-6300 Series

- Heavy-duty cash drawer with innovative "Screwless" design
- Ruggedized with reinforced steel and anti-scratch painting
- Large ball bearings design for smooth drawer slide
- Precision mechanical fitting to assure wobble-free operation
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- Various cash tray configurations
- Additional tray cover with lock (optional)
- Dimension : 426 mm (W) x 456 mm (D) x 100 mm (H); Weight : 8.8 kg

CR-6310B : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range

CR-6314B : Dedicated Serial, powered by 12V DC PC power kit

CR-6315B : USB, powered by 12V DC adaptor

CR-6325B : USB, powered by standard USB, auto step up to 12V

Cash Drawer



CR-4000 Series / CR-4100 Series

- Medium size cash drawer with innovative "Screwless" design
- 5 adjustable bill compartments with plastic bill clip on CR-4000 series
- 5 fixed bill compartments with metal bill clip on CR-4100 series
- 9 fixed coin compartments
- Additional tray cover with lock (optional)
- Precision mechanical fitting to ensure wobble-free operation
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- 255 drawer open codes defined via DIP switch for added programming flexibility (CR-4x02/CR-4x03)
- Serial In + Serial Out and Parallel In + Parallel Out connectors allow device to be daisy-chained after cash drawer (CR-4x02 / CR-4x03)
- Dimension : 428 mm (W) x 460 mm (D) x 100 mm (H);
Weight : 6 kg

CR-4000/CR-4100 : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-4001/CR-4101 : Dedicated Serial, powered by 12V DC adaptor
CR-4002/CR-4102 : Non-dedicated Serial, powered by 12V DC adaptor
CR-4003/CR-4103 : Parallel, powered by 12V DC adaptor
CR-4004/CR-4104 : Dedicated Serial, powered by 12V DC PC power kit
CR-4005/CR-4105 : USB, powered by 12V DC adaptor
CR-4015/CR-4115 : USB, powered by standard USB, auto step up to 12V



CR-3100 Series

- Compact cash drawer with innovative "Screwless" design
- Ruggedized with reinforced steel
- Large ball bearings design for smooth drawer slide
- Precision mechanical fitting to assure wobble-free operation
- 5 adjustable bill compartments with plastic bill clip
- 5 fixed bill compartments with metal bill clip for CR-3100-US
- Adjustable coin compartments
- Additional tray cover with lock (optional)
- Three position lock to ensure maximum security
- Cheque slot for non-cash transaction
- Dimension : 400 mm (W) x 410 mm (D) x 85 mm (H);
Weight : 6.7 kg

CR-3100/CR-3100-US : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-3104 : Dedicated Serial, powered by 12V DC PC power kit
CR-3115 : USB, powered by standard USB, auto step up to 12V



CR-2200 Series

- Flip-top cash drawer with innovative "Screwless" design
- Ruggedized Aluminum die-casting construction
- Cheque slot for non-cash transaction
- 2 fixed and 4 adjustable (total 6) bill compartments
- 1 fixed and 7 adjustable (total 8) coin compartments
- Additional tray cover with lock (optional)
- Dimension : 460 mm (W) x 175 mm (D) x 102 mm (H);
Weight : 4.3 kg

CR-2210B : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range
CR-2214B : Dedicated Serial, powered by 12V DC PC power kit
CR-2215B : USB, powered by 12V DC adaptor
CR-2225B : USB, powered by standard USB, auto step up to 12V



CR-2020B

- Flip-top cash drawer with innovative "Screwless" design
- Aluminum die-casting body with plastic top cover
- Cheque slot for non-cash transaction
- 6 fixed bill compartments
- 8 adjustable coin compartments
- Dimension : 480 mm (W) x 175 mm (D) x 102 mm (H);
Weight : 4.3 kg
- Interface : Printer driven, powered by printer or POSIFLEX system CR port, support 12V/24V voltage range



SD-266

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX TP series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : All TP series



SD-366

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX HT series terminal and 12" monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : All HT series, TM/LM-2012X, LM-2212X



SD-466Z

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15"/17" KS series terminal and monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717, LM/TM-8115, LM-8025, TM-7117



SD-566W

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 12" KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : KS-7212



SD-666W

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15"/17" KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : iButton Reader
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717



SD-866W

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15"/17" KS series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID module, USB WIFI Dongle
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717

System Side Attachment SD/SA Series



SA-505Z

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" / 17"XT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option: RFID module (HID/VCOM Selectable) ,USB 3G dongle support
- Interface : USB
- System Supported : All 15"/ 17" XT series



SD-876W

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX TP series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID (HID/VCOM Selectable) module, USB WIFI Dongle
- Interface : USB
- System Supported : All TP series



SA-104Z

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 14" XT series
- Super slim design
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : All 14" XT series



SA-105Z

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" / 17" XT series
- Super slim design
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : All 15" / 17" XT series



SA-204Z

- Side attachment with iButton reader for POSIFLEX 14" XT series
- Super slim design
- Interface : USB
- System Supported : All 14" XT series



SA-205Z

- Side attachment with iButton reader for POSIFLEX 15" / 17" XT series
- Super slim design
- Interface : USB
- System Supported : All 15" / 17" XT series



SA-305Z

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" / 17" XT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID (HID/VCOM Selectable) module, Finger Print Sensor
- Interface : USB
- System Supported : All 15" / 17" XT series



SA-405Z

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" / 17" XT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- USB 3G Dongle support
- Interface : USB
- System Supported : All 15" / 17" XT series

System Side Attachment

KP Series



KP-100

- Side keypad attachment for POSIFLEX TP series
- 40 programmable keys in 4 x 10 matrix structure
- Software program for non-English (European) language
- Optional MSR (HID/VCOM Selectable) and Smartcard reader
- Interface : USB
- System Supported : All TP series



KP-200

- Side keypad attachment for POSIFLEX HT series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR (HID/VCOM Selectable) and Smartcard reader
- Interface : USB
- System Supported : All HT series



KP-300W

- Side keypad attachment for POSIFLEX 15"/17" KS series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR (HID/VCOM Selectable)
- Interface : USB
- System Supported : KS-6715, KS-7215, KS-7217, KS-7515, KS-7517, KS-7715, KS-7717



KP-312W

- Side keypad attachment for POSIFLEX 12" KS series
- 36 programmable keys + 6 position control key
- Software program for non-English (European) language
- Optional MSR (HID/VCOM Selectable)
- Interface : USB
- System Supported : KS-7212



KP-450

- Side keypad attachment for POSIFLEX KS-7210 series
- 45 programmable keys
- Software program for non-English (European) language
- Interface : USB
- System Supported : KS-7210, KS-7210HS, KS-7210TS



KP-500

- Side keypad attachment for POSIFLEX 15" /17" XT series
- 40 programmable keys
- Software program for non-English (European) language
- Optional MSR and RFID (HID/VCOM Selectable) module (MSR viala 104 attachment)
- Interface : USB
- System Supported : All 15"/17" XT series



SL-104Z

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 14" LM/TM-3000 series monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : All 14" LM/TM-3000 series



SL-105Z

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" LM/TM-3000 series monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Interface : USB
- System Supported : All 15" LM/TM-3000 series



FA-266

- Side attachment with MSR (HID/VCOM Selectable) for POSIFLEX FT series terminal
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : Finger Print Sensor
- Interface : USB
- System Supported : FT-7715



SL-305Z

- 3-in-1 side attachment with MSR (HID/VCOM Selectable) for POSIFLEX 15" LM/TM-3000 series monitor
- Bi-directional swipe
- 3-track support
- Support ISO 7811 magnetic card
- Option : RFID (HID/VCOM Selectable) module, Finger Print Sensor
- Interface : USB
- System Supported : All 15" LM/TM-3000 series

POSIFLEX

Certifications



Design and Manufacturing in Taiwan by Posiflex Technology Inc.
The product information and specifications are subject to change without prior notice.

2014Q3



POSIFLEX TECHNOLOGY INC.
No. 6, Wuquan Rd., Wugu Dist., New Taipei City 24886, Taiwan
Tel : +886-2-2299-1599 E-mail : sales@posiflex.com.tw
Fax : +886-2-2299-1819 www.posiflex.com

Authorized Distributor / Reseller